
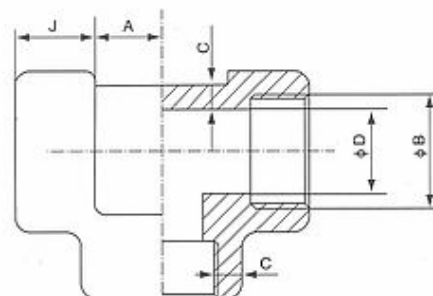
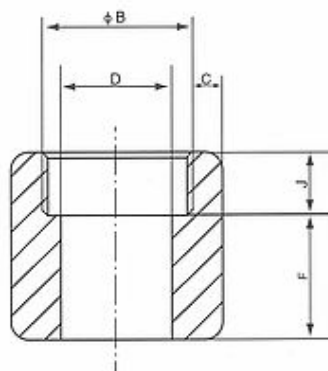


- 3000LB NPT DİŞLİ KROS
- 3000LB NPT GEAR CROSS

Standartlar / Standards: ASTM A182





- 3000LB NPT DİŞLİ MANŞON
- 3000LB NPT GEAR COUPLING

- 3000LB NPT DİŞ TEE
- 3000LB NPT GEAR TEE

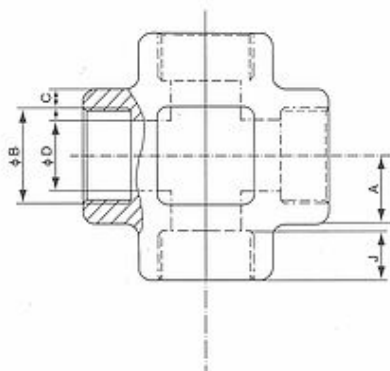

Depth of Socket J	Center to Bottom of Socket–A						Laying Lengths		Tolerances			End Wall Thickness K		
	90° Elbow,Tee,and Crosses			45° Elbows			Couplings E	Half Couplings F						
	Class Designation								Class Designation					
Min.	3000	6000	9000	3000	6000	9000			A	E	F	3000	6000	9000
9.5	11.0	11.0		8.0	8.0		6.5	16.0	1.0	1.5	1.0	5.0	6.5	
9.5	11.0	13.5		8.0	8.0		6.5	16.0	1.0	1.5	1.0	5.0	6.5	
9.5	13.5	15.5		8.0	11.0		6.5	17.5	1.5	3.0	1.5	5.0	6.5	
9.5	15.5	19.0	25.5	11.0	12.5	15.5	9.5	22.5	1.5	3.0	1.5	6.5	8.0	11.0
12.5	19.0	22.5	28.5	13.0	14.0	19.0	9.5	24.0	1.5	3.0	1.5	7.0	9.0	13.0
12.5	22.5	27.0	32.0	14.0	17.5	20.5	12.5	28.5	2.0	4.0	2.0	10.0	11.0	14.0
12.5	27.0	32.0	35.0	17.5	20.5	22.5	12.5	30.0	2.0	4.0	2.0	10.0	12.0	14.0
12.5	27.0	38.0	38.0	20.5	25.5	25.5	12.5	32.0	2.0	4.0	2.0	11.0	13.5	16.0
16.0	38.0	41.0	54.0	25.5	28.5	28.5	19.0	41.0	2.0	4.0	2.0	13.0	16.5	19.0
16.0	41.0			28.5			19.0	43.0	2.5	5.0	2.5	16.0	19.5	
16.0	57.0			32.0			19.0	44.5	2.5	5.0	2.5	19.0	23.0	
19.0	66.5			41.0			19.0	48	2.5	5.0	2.5	20.0	28.5	

- Standartlar / Standards: ASTM A182

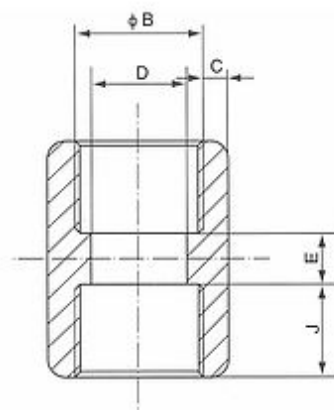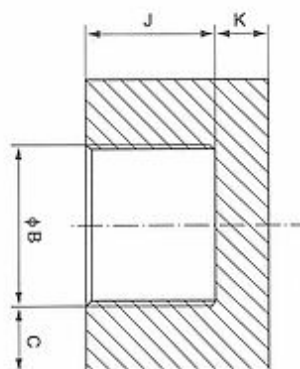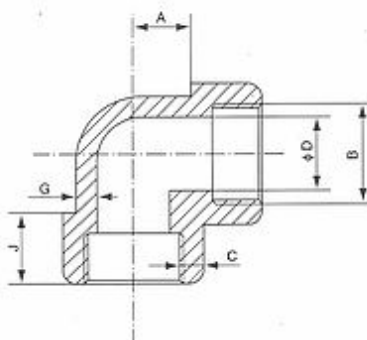

DN	Nom.Pipe Size	Threaded BSPT NPT B	Bore Diameter of Fittings (2) D			Socket Wall Thickness (1) C						Body Wall G		
						Class Designation						Class Designation		
			Class Designation			3000		6000		9000		3000	6000	9000
			3000	6000	9000	Ave.	Min.	Ave.	Min.	Ave.	Min.	Ave.	Min.	Min.
6	1/8	1/8"	7.6	4.8		3.18	3.18	3.96	3.43			2.41	3.15	
			6.1	3.2										
8	1/4	1/4"	10.0	7.1		3.78	3.3	4.6	4.01			3.02	3.68	
			8.5	5.6										
10	3/8	3/8"	13.3	9.9		4.01	3.5	5.03	4.37			3.2	4.01	
			11.8	8.4										
15	1/2	1/2"	16.6	12.5	7.2	4.67	4.09	5.97	5.18	9.35	8.18	3.73	4.78	7.47
			15.0	11.0	5.6									
20	3/4	3/4"	21.7	16.3	11.8	4.9	4.27	6.96	6.04	9.78	8.56	3.91	5.56	7.82
			20.2	14.8	10.3									
25	1	1"	27.4	21.5	16.0	5.69	4.98	7.92	6.93	11.38	9.96	4.55	6.35	9.09
			25.9	19.9	14.4									
32	1 1/4	1 1/4"	35.8	30.2	23.5	6.07	5.28	7.92	6.93	12.14	10.62	4.85	6.35	9.7
			34.3	28.7	22.0									
40	1 1/2	1 1/2"	41.6	34.7	28.7	6.35	5.54	8.92	7.8	12.7	11.12	5.08	7.14	10.15
			40.1	33.2	27.2									
50	2	2"	53.3	43.6	38.9	6.93	6.04	10.92	9.5	13.84	12.12	5.54	8.74	11.07
			51.7	42.1	37.4									
65	2 1/2	2 1/2"	64.2			8.76	7.67					7.01		
			61.2											
80	3	3"	79.4			9.52	8.3					7.62		
			76.4											
100	4	4"	103.8			10.69	9.35					8.56		
			100.7											

■ 3000LB SOKET YARIM MANŞON

■ 3000LB SOCKET HALF COUPLING

■ 3000LB SOKET TEE

■ 3000LB SOCKET TEE





■ 3000LB SOKET KURUVA

■ 3000LB SOCKET CROSS

■ 3000LB SOKET MANŞON

■ 3000LB SOCKET COUPLING




Standartlar / Standards: ASTM A182

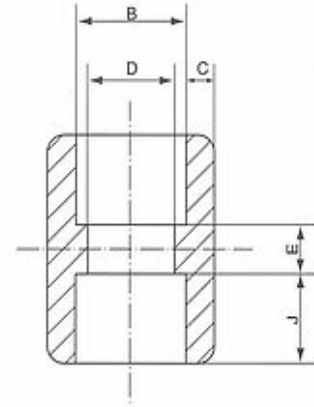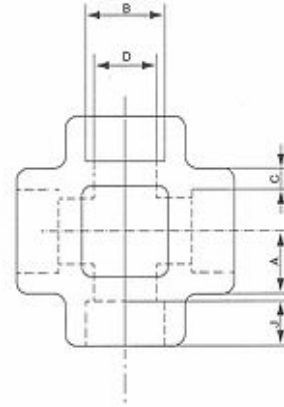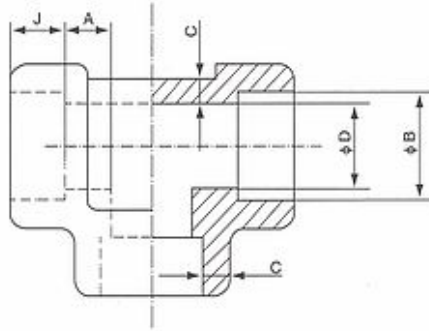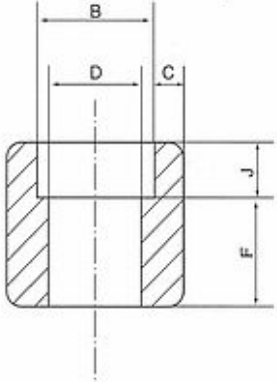

Depth of Socket J	Center to Bottom of Socket–A						Laying Lengths		Tolerances			End Wall Thickness K		
	90° Elbows,Tee,and Crosses			45° Elbows			Couplings E	Half Couplings F						
												Class Designation		
	Min.	3000	6000	9000	3000	6000			9000	A	E	F	3000	6000
9.5	11.0	11.0		8.0	8.0		6.50	16.0	1.0	1.5	1.0	5.0	6.5	
9.5	11.0	13.5		8.0	8.0		6.50	16.0	1.0	1.5	1.0	5.0	6.5	
9.5	13.5	15.5		8.0	11.0		6.50	17.5	1.5	3.0	1.5	5.0	6.5	
9.5	15.5	19.0	25.5	11.0	12.5	15.5	9.50	22.5	1.5	3.0	1.5	6.5	8.0	11.0
12.5	19.0	22.5	28.5	13.0	14.0	19.0	9.50	24.0	1.5	3.0	1.5	7.0	9.0	13.0
12.5	22.5	27.0	32.0	14.0	17.5	20.5	12.50	28.5	2.0	4.0	2.0	10.0	11.0	14.0
12.5	27.0	32.0	35.0	17.5	20.5	22.5	12.50	30.0	2.0	4.0	2.0	10.0	12.0	14.0
12.5	32.0	38.0	38.0	20.5	25.5	25.5	12.50	32.0	2.0	4.0	2.0	11.0	13.5	16.0
16.0	38.0	41.0	54.0	25.5	28.5	28.5	19.0	41.0	2.0	4.0	2.0	13.0	16.5	19.0
16.0	41.0			28.5			19.0	43.0	2.5	5.0	2.5	16.0	19.5	
16.0	57.0			32.0			19.0	44.5	2.5	5.0	2.5	19.0	23.0	
19.0	66.5			41.0			19.0	48.0	2.5	5.0	2.5	20.0	28.5	

■ 3000LB SOCKET ELBOW

Standartlar / Standards: ASTM A182

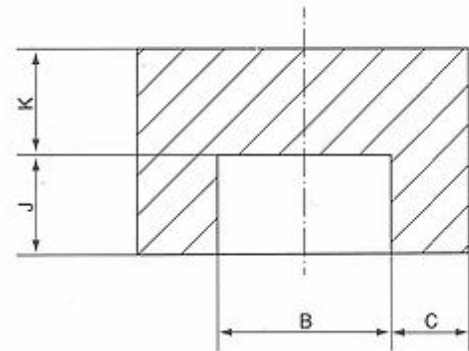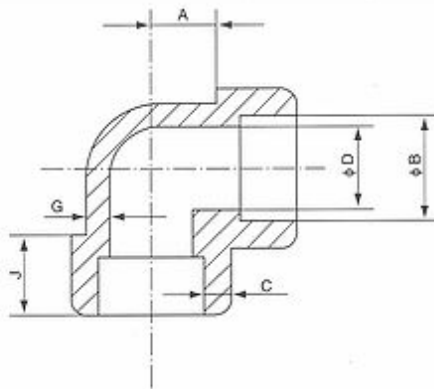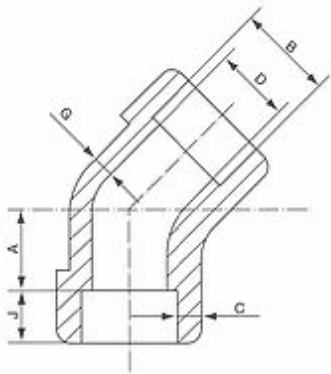

DN	Nom.Pipe Size	Socket bore Dia.(2)B	Bore Diameten of Fittings (2)D			Socket Wall Thickness (1) C						Body Wall G		
						Class Designation						Class Designation		
			Class Designation			3000		6000		9000		3000	6000	9000
			3000	6000	9000	Ave.	Min.	Ave.	Min.	Ave.	Min.	Ave.	Min.	Ave.
6	1/8	11.2	7.6	4.8		3.18	3.18	3.96	3.43			2.41	3.15	
		10.8	6.1	3.2										
8	1/4	14.6	10.0	7.1		3.78	3.30	4.60	4.01			3.02	3.68	
		14.2	8.5	5.6										
10	3/8	18.0	13.3	9.9		4.01	3.50	5.03	4.37			3.20	4.01	
		17.6	11.8	8.4										
15	1/2	22.2	16.6	12.5	7.2	4.67	4.09	5.97	5.18	9.35	8.18	3.73	4.78	7.47
		21.8	15.0	11.0	5.6									
20	3/4	27.6	21.7	16.3	11.8	4.90	4.27	6.96	6.04	9.78	8.56	3.91	5.56	7.82
		27.2	20.2	14.8	10.3									
25	1	34.3	27.4	21.5	16.0	5.69	4.98	7.92	6.93	11.38	9.96	4.55	6.35	9.09
		33.9	25.9	19.9	14.4									
32	1 1/4	43.1	35.8	30.2	23.5	6.07	5.28	7.92	6.93	12.14	10.62	4.85	6.35	9.70
		42.7	34.3	28.7	22.0									
40	1 1/2	49.2	41.6	34.7	28.7	6.35	5.54	8.92	7.80	12.70	11.12	5.08	7.14	10.15
		48.8	40.1	33.2	27.2									
50	2	61.7	53.3	43.6	38.9	6.93	6.04	10.92	9.50	13.84	12.12	5.54	8.74	11.07
		61.2	51.7	42.1	37.4									
65	2 1/2	74.4	64.2			8.76	7.67					7.01		
		73.9	61.2											
80	3	90.3	79.4			9.52	8.30					7.62		
		89.8	76.4											
100	4	115.7	103.8			10.69	9.35					8.56		
		115.2	100.7											