


■ (DIN 2999) ÇİFT TARAFLI BORU NİPEL
■ BARREL NIPPLE

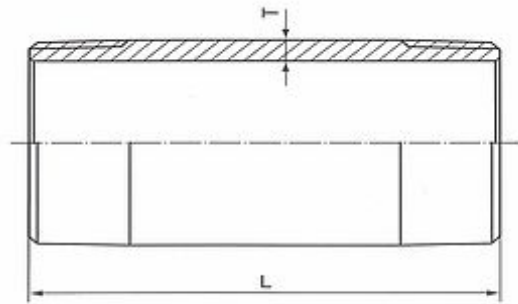

FEATURES

- ☐ **The thread ends conform to**
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- ☐ **Dimension conform to**
ISO 4144, SP114
EN-10241, JIS
- ☐ **150 LBS**
- ☐ **Material conform to**
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC
- ☐ **MADE FROM CASTING, WELD PIPE OR SEAMLESS PIPE**


[illegible][illegible]

■ (DIN 2999) TEK TARAFLI NİPEL
■ WELDING NIPPLE



FEATURES

- ☐ **The thread ends conform to**
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- ☐ **Dimension conform to**
ISO 4144, SP114
EN-10241, JIS
- ☐ **150 LBS**
- ☐ **Material conform to**
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC
- ☐ **MADE FROM CASTING, WELD PIPE OR SEAMLESS PIPE**


[illegible][illegible]

■ (DIN 2999) DIŞLİ KONİK REKOR
■ GEAR UNION



FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

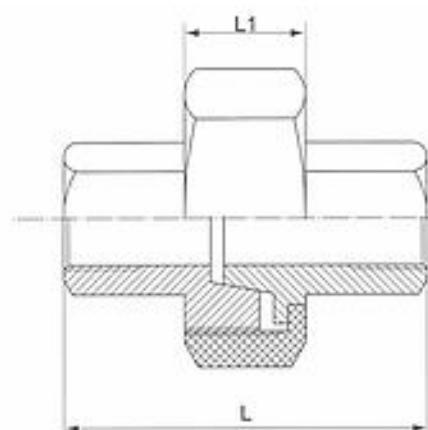


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	L1	13	13.5	15	16	17	20	22	24	27	29.5	31	34
	L	30	33.5	36.5	39.5	42.5	50	54	58	65	75	83	110
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	L1	13.5	13.5	14.5	15.5	16.5	18.5	21	23	25	27	29	32
	L	33	33	34	40	42	49	55	58	63	71	79	92
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	L1	13.5	13.5	15.5	17	19	20.5	23	26	28.5	28.5	30	34
	L	29	37.5	38	42	50.4	48	59	65	69	80	88	108

■ (DIN 2999) DIŞLİ KONİK REKOR
■ GEAR UNION TEFLON FALT



FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

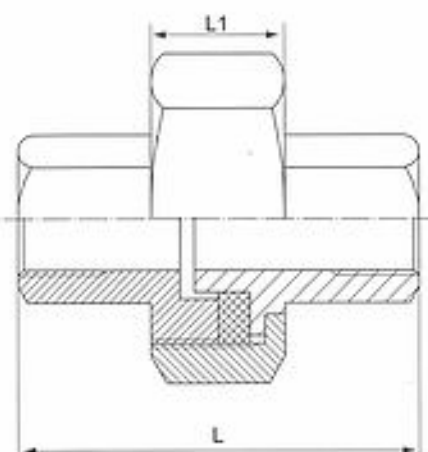


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	L1	13	13.5	15	16	17	20	22	24	27	29.5	31	34
	L	30	33.5	36.5	39.5	42.5	50	54	58	65	75	83	110
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	L1	13.5	13.5	14.5	15.5	16.5	18.5	21	23	25	27	29	32
	L	33	33	34	40	42	49	55	58	63	71	79	92
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	L1	13.5	13.5	15.5	17	19	20.5	23	26	28.5	28.5	30	34
	L	29	37.5	38	42	50.4	48	59	65	69	80	88	108

■ DIŞLI REDÜKSİYON
■ GEAR BUSHING



FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

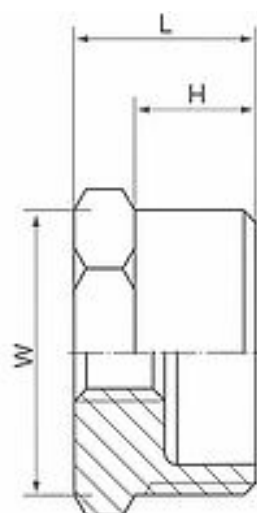

Standard	SIZE	1/4	3/8	1/2		3/4		1		1 1/4	
		1/8	1/4	1/4	3/8	3/8	1/2	1/2	3/4	3/4	1
ISO4144	H	11.5	12	14.5	14.5	15.5	15.5	17.5	17.5	20	20
	L	16	16.5	20	20	21	21	24	24	27	27
	W	14	18	22	22	27.5	27.5	34.5	34.5	43	43
Standard	SIZE	1 1/2		2		2 1/2		3		4	
		1	1 1/4	1 1/4	1 1/2	1 1/2	2	2	2 1/2	2 1/2	3
ISO4144	H	20.5	20.5	24	24	27	27	30	30	35	35
	L	28.5	28.5	32	32	37	37	40	40	45	45
	W	49	49	61	61	76	76	90	90	115	115

Standard	SIZE	1/4	3/8	1/2		3/4		1		1 1/4	
		1/8	1/4	1/4	3/8	3/8	1/2	1/2	3/4	3/4	1
JIS	H	12	13	16	16	18	18	20	20	22	22
	L	17	18	21	21	24	24	27	27	30	30
	W	17	21	26	26	31	31	38	38	46	46
Standard	SIZE	1 1/2		2		2 1/2		3		4	
		1	1 1/4	1 1/4	1 1/2	1 1/2	2	2	2 1/2	2 1/2	3
JIS	H	23	23	25	25	28	28	31	31	37	37
	L	32	32	36	36	39	39	44	44	51	51
	W	53	53	63	63	80	80	90	90	119	119

Standard	SIZE	1/4	3/8	1/2		3/4		1		1 1/4	
		1/8	1/4	1/4	3/8	3/8	1/2	1/2	3/4	3/4	1
SP-114	H	11.7	13	15	15	18	18	19.6	19.6	22.5	22.5
	L	18	19	21	21	26	26	27.6	27.6	32	32
	W	16.7	21	25	25	29	29	37	37	48	48
Standard	SIZE	1 1/2		2		2 1/2		3		4	
		1	1 1/4	1 1/4	1 1/2	1 1/2	2	2	2 1/2	2 1/2	3
SP-114	H	22	22	25.5	25.5	32	32	34.5	34.5	38	38
	L	32	32	37.6	37.6	44	44	46	46	52	52
	W	53	53	63	63	80	80	92	92	116	116


Standard	SIZE	1 1/2		2		2 1/2		3		4	
		1	1 1/4	1 1/4	1 1/2	1 1/2	2	2	2 1/2	2 1/2	3
EN-10241	H	10.8	11.9	15.6	15.4	17.4	17.5	19.7	19.7	21.9	21.9
	L	15.2	16.3	21	21	24	24	27	27	30	30
	W	16	18	26	26	30	30	35	35	45	45
Standard	SIZE	1/4	3/8	1/2		3/4		1		1 1/4	
		1/8	1/4	1/4	3/8	3/8	1/2	1/2	3/4	3/4	1
EN-10241	H	25.8	25.8	24.8	24.8	30.9	30.9	33	33	35	35
	L	38	38	36	36	45	45	47	47	52	52
	W	52	52	63	63	81	81	95	95	110	110

■ DIN2999) DIŞLI KURUVA
■ GEAR KROS



FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

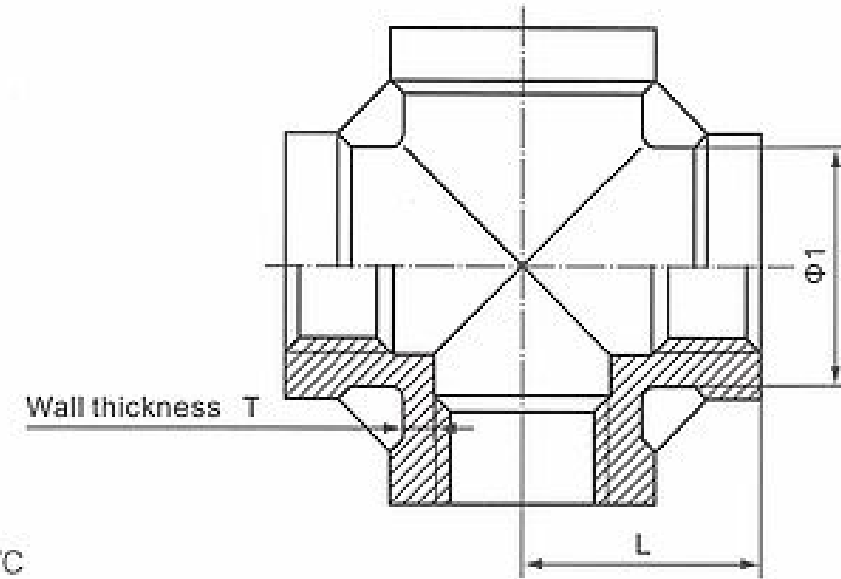


standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	Φ1	13	16	20	24.5	30	37.5	46.5	53	65.5	82	95.5	121.5
	L	17	19	23	27	32	38	45	48	57	69	78	96
	T	2.5	2.5	2.8	1.65	1.75	2	2.25	2.5	2.85	3.25	3.75	4.25
standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
JIS	Φ1	16	19	22	26	32	39	48	55	67	83.5	97	123
	L	17	19	23	27	32	38	46	48	57	69	78	96
	T	2.5	2.5	2.5	2.5	3	3	3.5	3.5	4	4.5	5	5.5
standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	Φ1	13.5	15.4	19.7	26.2	31.9	39.8	47.8	55.9	66.5	83.3	98.2	123
	L	20.6	20.6	23.6	28.5	33.3	38.1	44.5	49	57.1	68	77.6	96.8
	T	2.7	2.7	2.7	2.7	3.2	3.2	3.8	3.8	4	4.7	5.2	6
standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	Φ1	15.2	19.7	23.3	28	34.8	43.6	53	58	71	87	100	126
	L	17	18.5	22.9	26.8	32	37.5	45.9	47.6	58	70	77	97
	T	3.6	4.35	4.85	3.4	4.15	5.05	5.5	5	5.6	5.75	6	6.5

■ (DIN 2999) 6 (KÖŞE) HEX NİPEL
■ HEXAGON NİPEL



FEATURES

- ☐ The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- ☐ Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- ☐ 150 LBS
- ☐ Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

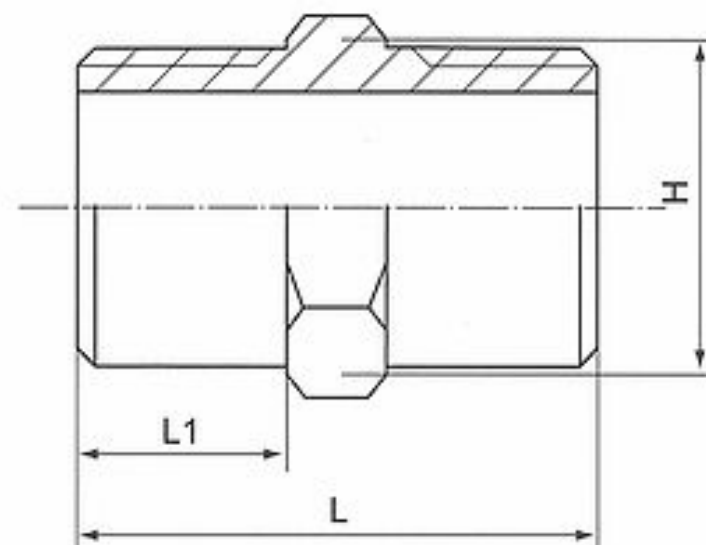


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	L	20	25	27	34	36.5	42	47.5	17.5	57	61	67.5	80
	L1	8	10.5	11	14.5	15.5	18	20.5	20.5	25	27	30	36
	H	11	15	18	22	28	35	43.5	49.5	62	77.5	90.5	117
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
JIS	L	32	34	36	42	47	52	56	60	66	73	82	93
	L1	11	12	13	16	18	20	22	23	26	28	33	36
	H	14	17	21	26	31	38	46	53	63	81	94	118
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	L	33	30	31.8	38	43.8	49.7	54	59.9	65.5	72.9	80	91
	L1	12.9	12	12.8	15	17	19.6	20.7	22.8	25.6	27.8	31	35.7
	H	12.5	17	20.9	26	31	38	45	52	62.7	80	92	117.5
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	L	23.6	27.8	28	34	40	46	52.5	54	62	70	78.4	94
	L1	8.9	11	12.2	14.9	16.5	19.5	21.5	22.2	24.4	28.5	31.7	38.2
	H	12	16	19	21.6	30	36	46	50	64.5	79.5	90	120

■ (DIN 2999) DIŞLI DİRSEK
■ GEAR ELBOW



FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144
SP114
EN-10241
JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

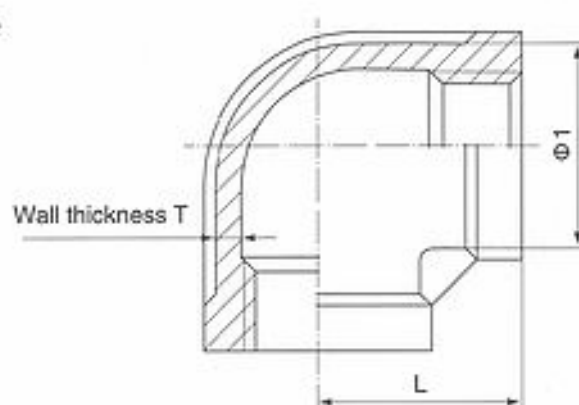


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	Ø1	13	16	20	24.5	30	37.5	46.5	53	65.5	82	95.5	121.5
	L	17	19	23	27	32	38	45	48	57	69	78	96
	T	2.5	2.5	2.8	1.65	1.75	2	2.25	2.5	2.85	3.25	3.75	4.25
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
JIS	Ø1	16	19	22	26	32	39	48	55	67	83.5	97	123
	L	17	19	23	27	32	38	46	48	57	69	78	96
	T	2.5	2.5	2.5	2.5	3	3	3.5	3.5	4	4.5	5	5.5
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	Ø1	13.5	15.4	19.7	26.2	31.9	39.8	47.8	55.9	66.5	83.3	98.2	123
	L	20.6	20.6	23.6	28.5	33.3	38.1	44.5	49	57.1	68	77.6	96.8
	T	2.7	2.7	2.7	2.7	3.2	3.2	3.8	3.8	4	4.7	5.2	6
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	Ø1	15.2	19.7	23.3	28	34.8	43.6	53	58	71	87	100	126
	L	17	18.5	22.9	26.8	32	37.5	45.9	47.6	58	70	77	97
	T	3.6	4.35	4.85	3.4	4.15	5.05	5.5	5	5.6	5.75	6	6.5

■ (DIN 2999) DIŞLI KUYRUKLU DİRSEK
■ STARE ELBOW



FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144
SP114
EN-10241
JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

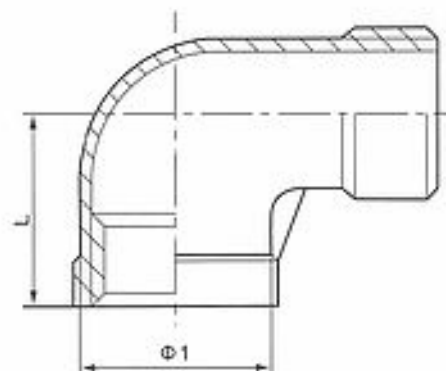


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	Ø1	13	16	20	24.5	30	37.5	46.5	53	65.5	82	95.5	121.5
	L	17	19	23	27	32	38	45	48	57	69	78	97
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
JIS	Ø1	16	19	22	26	32	39	48	55	67	83.5	97	123
	L	17	19	23	27	32	38	46	48	57	69	78	96
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	Ø1	13.5	15.4	19.7	26.2	31.9	39.8	47.8	55.9	66.5	83.3	98.2	123
	L	20.6	20.6	23.6	28.5	33.3	38.1	44.5	49	57.1	68	77.6	96.8
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	Ø1	17	21	25	29	35	43	52	58.8	71.7	86.2	98.6	121
	L	19	21	25	28	33	38	45	50	58	69	78	97

■ (DIN 2999) DIŞLİ MANŞON
■ GEAR COUPLIN



FEATURES

- ☐ The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- ☐ Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- ☐ 150 LBS
- ☐ Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC
- ☐ MADE FROM CASTING, WELD PIPE OR SEAMLESS PIPE

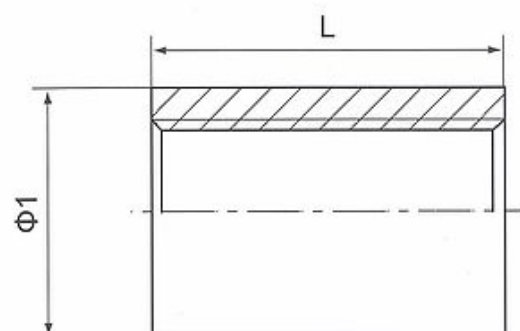


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	Φ1	13	16.5	20	24.5	30	37.5	46.5	53	65.5	82	95.5	121.5
	L	17	24	25	32	35	41	45	45	54	63	69	81
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
JIS	Φ1	16	19	22	26	32	39	48	55	67	83.5	97	123
	L	17	19	23	27	32	38	46	48	57	69	78	96
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	Φ1	14	18.5	21.5	26	32	39	48	54	66.5	82	95	122
	L	20	25	25	33	35	42	47	47	56	65	70	80
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	Φ1	15	18.5	21.3	26.4	31.8	39.5	49.3	55.5	69	87	103	126
	L	15	25	26	34	36	43	48	48	56	65	71	83

■ (DIN 2999) DIŞLİ TEE
■ GEAR TEE



FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- **150 LBS**
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

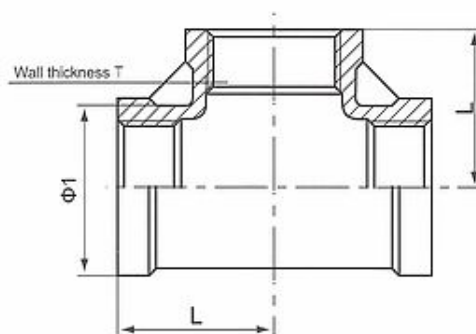


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	ø 1	13	16.5	20	24.5	30	37.5	46.5	53	65.5	82	95.5	121.5
	L	17	19	23	27	32	38	45	48	57	69	78	96
	T	2.5	2.5	2.8	1.65	1.75	2	2.25	2.5	2.85	3.25	3.75	4.25
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
JIS	ø 1	16	19	22	26	32	39	48	55	67	83.5	97	123
	L	17	19	23	27	32	38	46	48	57	69	78	96
	T	2.5	2.5	2.5	2.5	3	3	3.5	3.5	4	4.5	5	5.5
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	ø 1	13.5	15.4	19.7	26.2	31.9	39.8	47.8	55.9	66.5	83.3	98.2	123
	L	20.6	20.6	23.6	28.5	33.3	38.1	44.5	49	57.1	68	77.6	96.8
	T	2.7	2.7	2.7	2.7	3.2	3.2	3.8	3.8	4	4.7	5.2	6
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	ø 1	17	21.3	23.5	30	35	43	52	58	71	86.6	100.2	125
	L	19	21	23.6	28	33	38	45	50	58	70	78.5	97
	T	3.6	4.35	4.85	3.4	4.15	5.05	5.5	5	5.6	5.75	6	6.5

■ (DIN 2999) DIŞLİ HORTUM REKORU
■ HOSE NIPPLE



FEATURES

- The thread ends conform to
 - ASME B1.20.1(NPT)
 - DIN 2999 & BS21
 - ISO 228/1 & ISO 7/1
- Dimension conform to
 - ISO 4144, SP114
 - EN-10241, JIS
- 150 LBS
- Material conform to
 - ASTM A351-CF8M/1.4408
 - ASTM A351-CF8/1.4401
 - ASTM A216-WCB
 - AISI 304, 304L, 316, 316L, 301, 430 ETC
- MADE FROM CASTING OR BAR

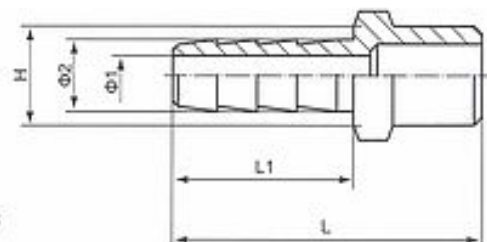


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	L	38	42.5	49	57.5	66	76	79	83	92	99	107.5	117
	L1	26	28	33	38	45	52	52	56	60	65	70	73
	Ø1	4	5	7	10.5	15	22	27.5	34	45	59	71	95
	Ø2	8	9	11.5	15	20	27	33	39.5	52	67	80	105
	H	11	15	18	22	28	35	43.5	49.5	62	77.5	90.5	117
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
JIS	L	33	41	44	49	59	69	74	79	89	109	134	149
	L1	19	23	24	25	34	44	44	45	54	61	91	96
	Ø1	5	6	8	11.5	16.5	23	28	35	47	61	73	96
	Ø2	9	11	12	16	22	29.5	36	42	54	65.5	78.5	103
	H	11	13	16	19.5	24.5	33.5	43.5	51.5	62.5	78.5	92.5	117.5
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	L	34	42	45	50	60	70	75	80	90	110	135	150
	L1	20	24	25	26	35	45	45	46	55	67	92	96
	Ø1	4	5	6	9	15	21.5	27	33	45	55	68	91
	Ø2	7	9	10	14	20	27.5	34	40	52	63.5	76.5	103
	H	14	16	19	22	27.5	36.6	46	52	63	79	93	118
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	L	45	47	55	64	68	71	80	95	105	125	150	165
	L1	31.6	31.8	38.5	43	44	44	50	57	67	80	103	113
	Ø1	2.5	4.4	7.5	10.7	17.1	23.4	28.8	35.1	47.5	58.5	68.2	87.6
	Ø2	4.5	6.4	9.5	12.7	19.1	25.4	31.8	38.1	50.8	63.5	76.2	101.6
	H	12.5	16.5	20	23.5	31	38.5	46	52	62	78	92	117

■ (DIN 2999) DIŞLİ KÖR TAPA
■ HEXAGON PLUG



FEATURES

- The thread ends conform to
 - ASME B1.20.1(NPT)
 - DIN 2999 & BS21
 - ISO 228/1 & ISO 7/1
- Dimension conform to
 - ISO 4144, SP114
 - EN-10241, JIS
- 150 LBS
- Material conform to
 - ASTM A351-CF8M/1.4408
 - ASTM A351-CF8/1.4401
 - ASTM A216-WCB
 - AISI 304, 304L, 316, 316L, 301, 430 ETC

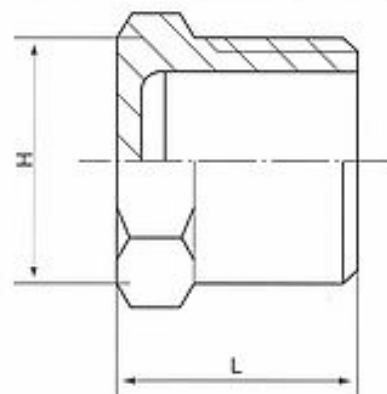


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	H	11	15	18	22	28	35	43.5	49.5	62	77.5	90.5	117
	L	12	14.5	16	19.5	21	24	27	27	32	34	37.5	44
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
JIS	H	13.8	16.7	21	25	29	37	48	53	63	80	92	116
	L	16.8	18	19	21	26	27.6	32	32	37.6	44	46	52
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	H	13.6	16.6	20.6	25.8	30.5	37.5	45.4	52.1	62.5	79.2	92.2	117.2
	L	16.9	18	18.9	22	25	27	30	31.8	35.7	38.9	43.9	50.6
Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	H	14	16	18	26	30	35	45	52	63	81	95	118
	L	13.4	15.2	16.5	21	24	27	30	38	36	45	47	52

■ (DIN 2999) KAYNAKLI KONİK REKOR

■ WELDING UNION

FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

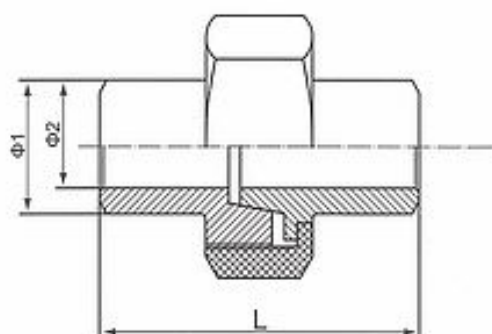

Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	Φ1	10.2	13.5	17.2	21.3	26.9	33.7	42.4	48.3	60.3	76.1	88.9	114.3
	Φ2	6.2	8.8	12.5	16	21.6	27.2	35.9	41.8	53	68.8	80.8	105.3
	L	26	35.5	38	44	45	50	55	57	65	71	80	95

Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	Φ1	10.7	13.5	17	21	26.9	33.7	42	48	60	76	88.9	114.3
	Φ2	6.5	8.8	12.3	16.7	21.6	27.2	36.3	41.5	53.3	68.9	80.8	105.3
	L	33	33	34	40	42	49	55	58	63	71	77	92


Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	Φ1	10.2	13.5	17.2	21.3	26.9	33.7	42.4	48.3	60.3	76.1	88.9	114.3
	Φ2	6.2	8.8	12.5	16	21.6	27.2	35.9	41.8	53	68.8	80.8	105.3
	L	26	35.5	38	42	50.4	48	59	64	69	75	84	99

■ (DIN 2999) TEFLON CONTALI KAYNAKLI KONİK REKOR

■ WELDING UNION TEFLON FLAT

FEATURES

- The thread ends conform to
ASME B1.20.1(NPT)
DIN 2999 & BS21
ISO 228/1 & ISO 7/1
- Dimension conform to
ISO 4144, SP114
EN-10241, JIS
- 150 LBS
- Material conform to
ASTM A351-CF8M/1.4408
ASTM A351-CF8/1.4401
ASTM A216-WCB
AISI 304, 304L, 316, 316L, 301, 430 ETC

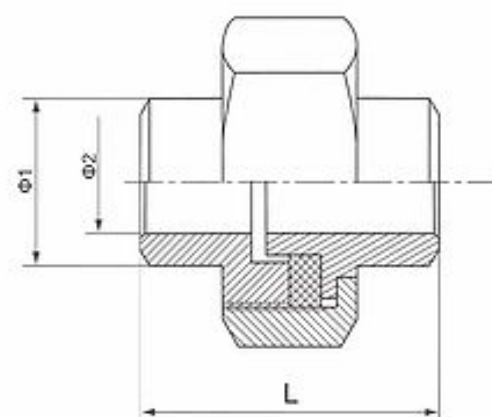

Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
ISO4144	Φ1	10.2	13.5	17.2	21.3	26.9	33.7	42.4	48.3	60.3	76.1	88.9	114.3
	Φ2	6.2	8.8	12.5	16	21.6	27.2	35.9	41.8	53	68.8	80.8	105.3
	L	26	35.5	38	44	45	50	55	57	65	71	80	95

Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
SP-114	Φ1	10.7	13.5	17	21	26.9	33.7	42	48	60	76	88.9	114.3
	Φ2	6.5	8.8	12.3	16.7	21.6	27.2	36.3	41.5	53.3	68.9	80.8	105.3
	L	33	33	34	40	42	49	55	58	63	71	77	92

Standard	SIZE	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
EN-10241	Φ1	10.2	13.5	17.2	21.3	26.9	33.7	42.4	48.3	60.3	76.1	88.9	114.3
	Φ2	6.2	8.8	12.5	16	21.6	27.2	35.9	41.8	53	68.8	80.8	105.3
	L	26	35.5	38	42	50.4	48	59	64	69	75	84	99