
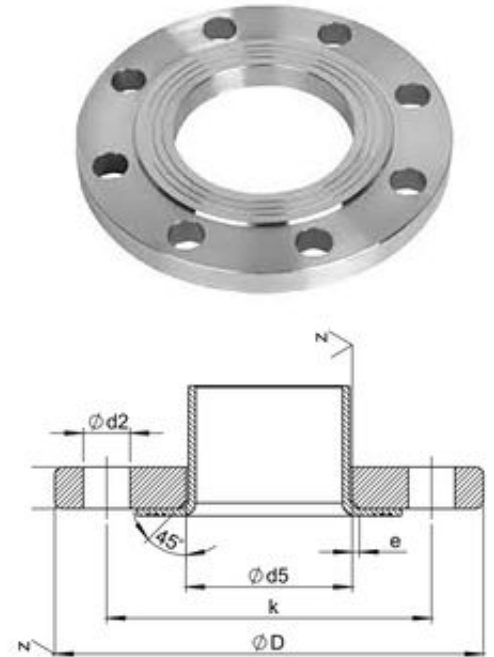


■ YAKA VE SERBEST FLANŞ
■ COLLAR AND LAPPED FLANGE

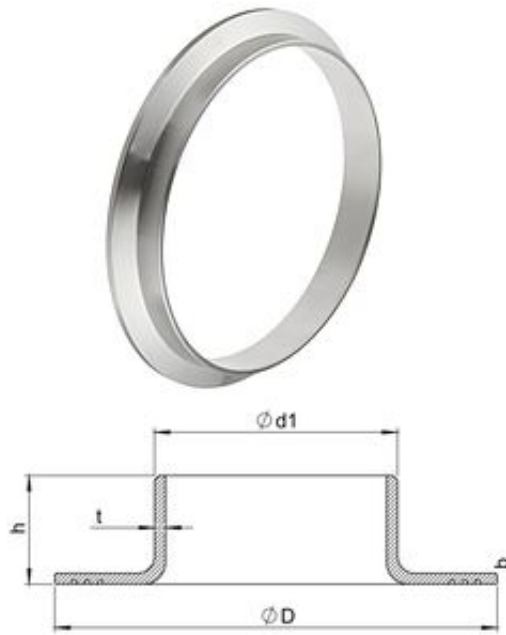

Yaka/Collars									Flanş/Flange										
Boyut/ Dimension	d1		D	t		h	Ağırlık/Weight Kg		Boyut/ Dimensions	Boru Çapı d1		D	b	k	e	d5	Delik Sayısı/ Number of hole	d2	Ağırlık/ Weight kg
NW									DN										
10	-	14	40	-	1.5	9	-	0.020	10	-	14	90	14	60	3	16			
	17.2	-		2.5	-		0.020	-		17.2	-					19	4	14	0.610
15	-	20	45	-	2	9	-	0.020	15	-	20	95	14	65	3	22			
	21.3	-		2.5	-		0.020	-		21.3	-					24	4	14	0.703
20	-	25	58	-	2	12	-	0.040	20	-	25	105	14	75	3	28			
	26.9	-		2.5	-		0.040	-		26.9	-					30	4	14	0.822
25	-	30	68	-	2	15	-	0.050	25	-	30	115	16	85	4	33			
	33.7	-		3	-		0.080	-		33.7	-					36	4	14	1.130
32	-	38	78	-	2	15	-	0.070	32	-	38	140	16	100	4	42			
	42.4	-		3	-		0.150	-		42.4	-					46	4	18	1.673
40	-	44.5	88	-	2	17	-	0.090	40	-	44.5	150	16	110	4	50			
	48.3	-		3	-		0.180	-		48.3	-					54	4	18	1.897
50	-	54	102	-	2	22	-	0.120	50	-	54	165	16	125	5	62			
	60.3	-		3	-		0.180	-		60.3	-					65	4	18	2.244
65	76.1	70	122	3	2	22	0.240	0.160	65	76.1	70	185	16	145	5	81	4	18	2.682
80	88.9	84	138	3	2	23	0.300	0.200	80	88.9	-	200	18	160	5	94	8	18	3.385
100	-	104	158	-	2	28	-	0.250	100	-	104	220	18	180	5	113			
	114.3	-		3	-		0.360	-		114.3	-					119	8	18	3.743
125	-	129	188	-	2	30	-	0.340	125	-	129	250	18	210	5	138			
	139.7	-		3	-		0.460	-		139.7	-					145	8	18	4.630
150	-	154	212	-	2	30	-	0.380	150	-	154	285	18	240	5	164			
	168.3	-		3	-		0.550	-		168.3	-					173	8	2	5.710
200	219.1	206	268	4	3	30	0.700	0.830	200	219.1	206	340	20	295	5	225	8	22	7.610
250	-	256	320	-	3	30	-	1.040	250	-	256	395	22	350	5	273	12	22	10.550
	273	-		4	-		1.260	-		273	-					279			
300	323.9	306	370	4	3	35	1.470	1.280	300	323.9	306	445	26	400	5	329	12	22	14.280
350	355.6	356	430	4	3	35	2.360	1.610	350	355.6	356	505	28	460	6	362			
	-	-		-	-		-	-		-	-					374	16	22	18.900
400	406.4	-	482	4	-	40	2.640	-	400	406.4	-	565	32	515	6	413			
	-	-		-	-		-	-		-	-					426	16	26	25.510
450	457.2	456	535	4	3	45	3.250	2.160	450	457.6	-	615	32	620	6	461	20	26	32.400
500	508	-	585	4	-	45	3.740	-	500	508	-	670	38	620	6	517	50	26	37.800
600	610	-	685	5	-	45	6.800	-	600	610	-	780	44	725	7	618	20	30	57.450
700	711	-	800	5	-	45	8.300	-	700	711	-	895	50	840	7	721	24	30	80.400
800	813	-	905	5	-	45	9.400	-	800	813	-	1015	56	950	7	824	24	33	113.200